



HyperAccess™ 24F MPO-LC Module

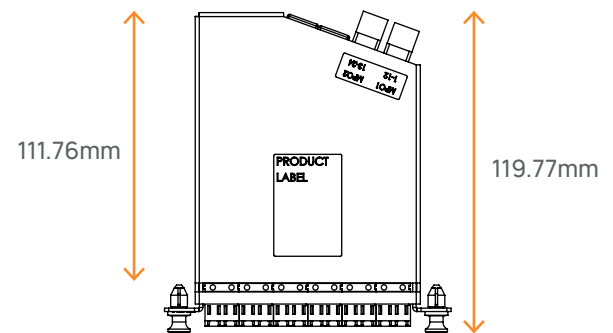

Features & Benefits

- High-density MPO-LC module
- Transition MPO to LC duplex
- 2xMPO12 at rear of module
- 24xLC at front of module
- Supports OM4, OM5 and OS2 fiber types
- Internal shutters on LCs
- Low-loss LC connections

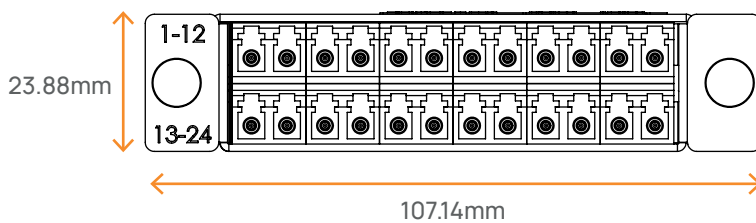

Description	Customer Configurator Selections
Number of Fibers	24
Fiber Mode	Customer Specified
End 1 Adapter	MPO12 Changeable Polarity
End 2 Adapter	LC
Single-Mode Color Code	
MPO Adapter	Black
LC Adapter	Blue
Multi-Mode Color Code	
MPO Adapter	Black
LC Adapter	Aqua

Part numbers

SDM-24M4-M12LC-U
SDM-24M5-M12LC-U
SDM-24SM-M12LC-U

Product Performance

Spec Parameter	Spec Value
Optical - Single-Mode	
Operational Wavelength	1310 / 1550 Nm
Insertion Loss	0.65 dB
Return Loss, MPO-APC	-60 dB
Return Loss, LC Simplex	-55 dB
Optical - Multi-Mode	
Operational Wavelength	850 / 1300 Nm
Insertion Loss @ 850 Nm	0.55 dB
Return Loss	-25 dB
Environmental	
Operational Temp Range	0 to +70 C
Installation Temp Range	0 to +60 C
ROHS	2011 / 65 / EU

©2022 viaPhoton, Inc. All rights reserved.