

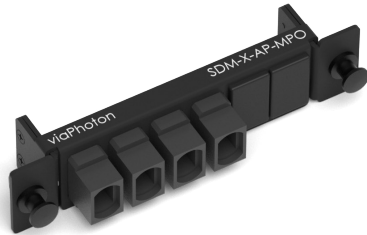


# HyperAccess™ MPO Adapter Panel

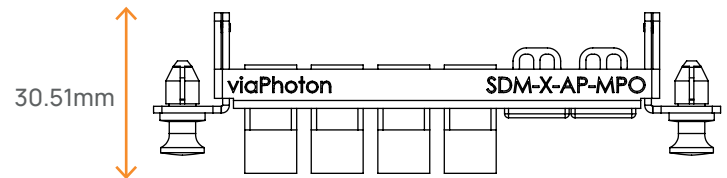

## Features & Benefits

- High-density MPO adapter panel
- 144F per panel (MPO24)
- Supports OM4, OM5 and OS2 fiber types
- Panel options from 1-6 MPO adapters
- Fits both rack mount and wall mount Panels

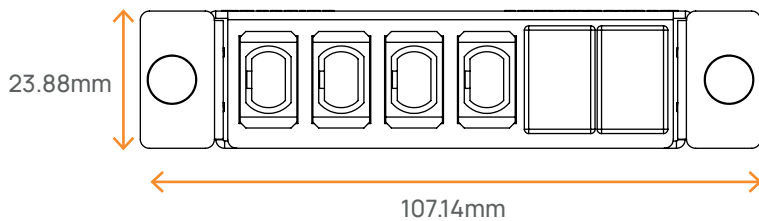

Part Description	600-MPO08MP -PCHG QTY	850-000017QTY
SDM-1-AP-MPO	1	5
SDM-2-AP-MPO	2	4
SDM-3-AP-MPO	3	3
SDM-4-AP-MPO	4	2
SDM-5-AP-MPO	5	1
SDM-6-AP-MPO	6	0

Product Performance	
Spec Parameter	Spec Value
Optical - Single-Mode	
Operational Wavelength	1310 / 1550 Nm
Insertion Loss	0.35 dB
Return Loss, MPO-APC	-60 dB
Optical - Multi-Mode	
Operational Wavelength	850 / 1300 Nm
Insertion Loss @ 850 Nm	0.25 dB
Return Loss	-25 dB
Environmental	
Operational Temp Range	0 to +70 C
Installation Temp Range	0 to +60 C
ROHS	2011 / 65 / EU

©2022 viaPhoton, Inc. All rights reserved.